

# SchwankAir

## 1200 Series AIR CURTAINS

### SUBMITTAL DATA

<b>PROJECT:</b>	
<b>ENGINEER:</b>	
<b>CONTRACTOR:</b>	
<b>DISTRIBUTOR:</b>	
<b>SchwankAir MODEL #:</b>	<input type="checkbox"/> 1036 <input type="checkbox"/> 1048 <input type="checkbox"/> 1060
<b>APPROVED BY:</b>	
<b>DATE:</b>	
<b>APPROVAL #:</b>	



**NOTICE:**

Schwank reserves the right to make changes to equipment and specifications due to revision in standards or to provide product improvement without obligation of notification.

This publication, or parts thereof, may not be reproduced in any form, without prior written consent from Schwank. Unauthorized use or distribution of this publication is strictly prohibited.

Schwank  
5285 Bradco Boulevard,  
Mississauga, Ontario,  
L4W 2A6

2 Schwank Way  
Waynesboro, Georgia,  
USA, 30830

Customer and Technical Services  
Phone: 1-877-446-3727  
Fax : 1-866-361-0523

e-mail: [csr@schwankgroup.com](mailto:csr@schwankgroup.com)

**[www.schwankgroup.com](http://www.schwankgroup.com)**


The SchwankAir 1200 Series air curtain is intended for indoor mounting at restaurant, retail, and other commercial building doorways at a mounting height up to 9'. [2700 mm].

The 1200 Series air curtain is designed for quiet operation to effectively separate indoor and outdoor environments by restricting entry of unconditioned air, dust, fumes, and insects. The 1200 Series air curtain can also be used at interior openings/doorways to coolers and clean rooms.

### **SchwankAir 1200 Series Features**

- Available in 3', 4' and 5' width
- High and low airflow settings
- Two-speed motors
- Remote control included
- Magnetic Door Switch — 12VDC included (2-wire connection)
- Factory wired 3 ft plug-in power cord
- Standard color is black
- Full length articulating discharge nozzle
- Adjustable air directional vanes with 20° sweep
- Full length steel rear mounting plate
- Voltage: 120VAC/60Hz/1Ph.
- UL Certified to conform to UL 507 (USA) and CSA 22.2 (Canada) Standards

**1200 SERIES AIR CURTAIN DIMENSIONS & PERFORMANCE**

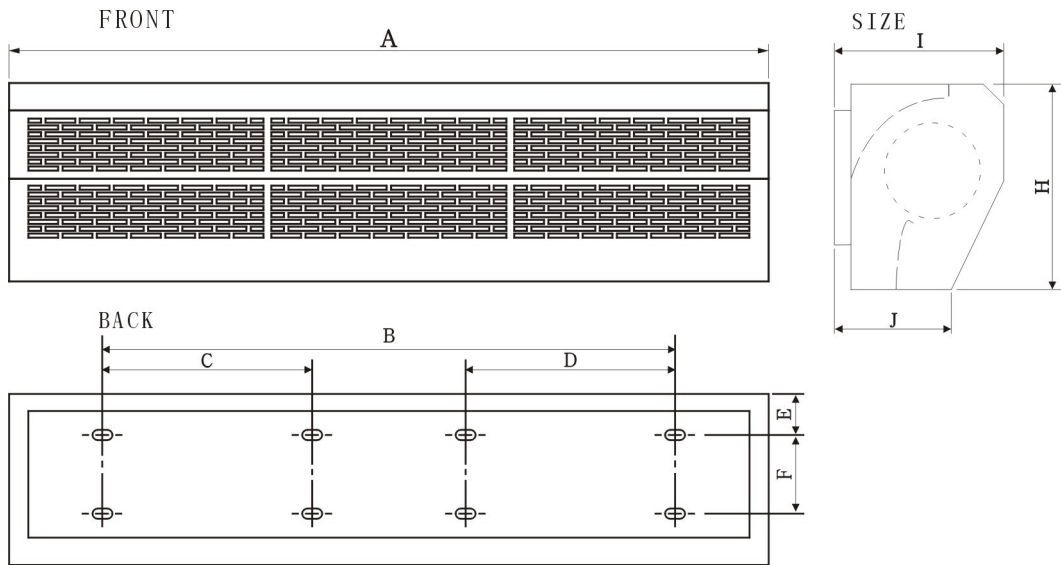

**DIMENSIONS**

MODEL	A inches [mm]	B inches [mm]	C inches [mm]	D inches [mm]	E inches [mm]	F inches [mm]	H inches [mm]	I inches [mm]	J inches [mm]
AC-1036-12-BK	37.20 [945]	17.33 [440]	---	---	2.05 [52]	5.71 [145]	10.24 [260]	8.66 [220]	5.12 [130]
AC-1048-12-BK	49.21 [1250]		---	---					
AC-1060-12-BK	61.18 [1554]	33.07 [840]	---	---					

**PERFORMANCE RATINGS**

Project Qty	MODEL	Volt (V)	Freq (Hz)	Max input power (W)		Max air speed (m/s)		Air volume (cfm)		Noise (dB)		Net weight	
				H	L	H	L	H	L	H	L	lb.	kg
	AC-1036-12-BK	120	60	380	300	13	10	1177	942	67	65	29.8	13.5
	AC-1048-12-BK			530	450			1648	1295	69	67	37.5	17
	AC-1060-12-BK			690	610			2119	1648	71	69	46.3	21